



maintenance-free


# sealed lead-acid battery

model #UB12260 (AGM)

upg #D5747




## Dimensions Terminal type: M6 Nut & Bolt

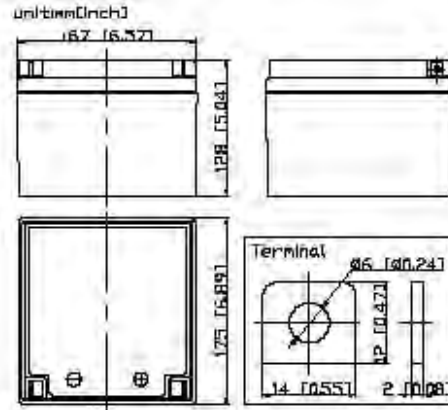

## Specifications

Nominal voltage		12V
Rated capacity (20 hour rate)		26.00Ah
Dimensions	Length	6.57in ( 166.9 mm)
	Width	6.89in ( 175.0 mm)
	Height	5.04in ( 128.0 mm)
	Total Height	5.04in ( 128.0 mm)
Approx. weight		18.08lbs ( 8.2 kg)


## Discharge characteristics 77° F (25° C) (Note)

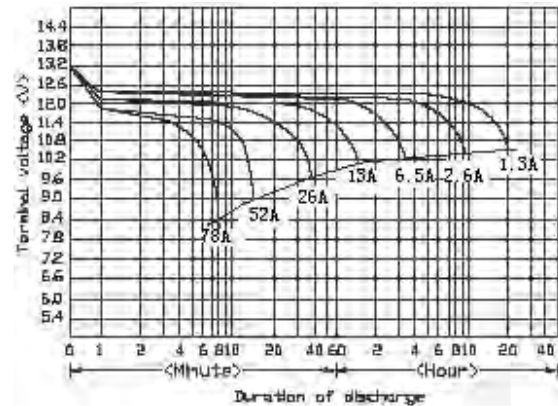

## Characteristics

Capacity <sup>(Note)</sup> 77° F (25° C)	20 hour rate( 1.30A)	26.00Ah	
	10 hour rate( 2.42A)	24.18Ah	
	5 hour rate( 4.42A)	22.10Ah	
	1 hour rate( 15.60A)	15.60Ah	
Internal resistance (milliohms)	Fully charged battery 77° F (25°C)	Approx. 14	
Temperature dependency of capacity (20 hour rate)	104° F	102%	
	77° F	100%	
	32° F	85%	
Self discharge 77° F (25°C)	Residual capacity after standing 3 months	91%	
	Residual capacity after standing 6 months	82%	
	Residual capacity after standing 12 months	64%	
Charge Method (Constant Voltage)	Cycle use (Repeating use)	Initial current	9.1 A or smaller
		Control voltage	14.5-14.9 V
	Float use	Control voltage	13.6-13.8 V

## Duration of discharge vs. Discharge current (Note)

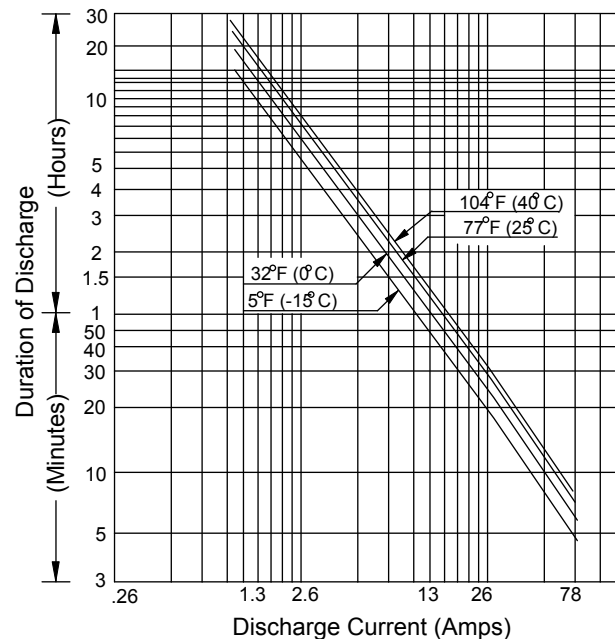

(Note) The above characteristics data are average values obtained within three charge/discharge. Cycles not the minimum values.